



Digital Crane Scale

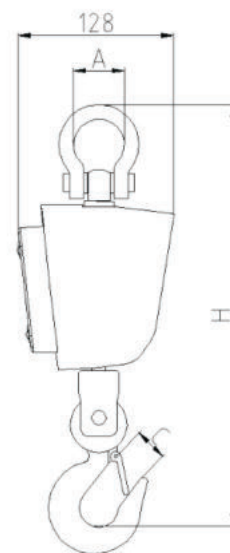

GSP909 (50kg~1t)

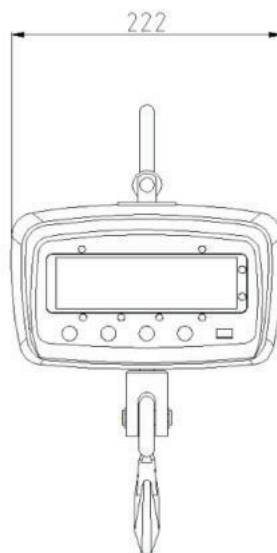

FEATURES

- NEMA 12/IP54 powder coated Die-Casting Aluminum, very light, easy to bring;
- Large red 5 digit LED display (digit height 30mm), Kg, lb,N are selectable, kg are default unit;
- Tare, Zero, Auto zero tracking, Total, Hold, Overload warning and record, operated through infrared remote controller;
- Battery Operated with low battery indication, Automatic turn off , power-saving function;
- The acceleration of gravity can be regulated through remote controller according to different places value.

SPECIFICATIONS

Model	Cap.(kg)	Min.weight(kg)	Interval(kg)	Min.weight(kg)	A(mm)	C(mm)	H(mm)	G.W.(kg)
GSP909-005	50	0.4	0.02	2500	34	24	320	5
GSP909-01	100	1	0.05	2000	34	24	320	5
GSP909-02	200	2	0.1	2000	34	24	320	5
GSP909-03	300	2	0.1	3000	34	24	320	5
GSP909-05	500	4	0.2	2500	42	25	345	5.5
GSP909-1	1000	10	0.5	2000	42	25	345	5.5

MAIN TECHNICAL DATA 

Accuracy Standard	According to OIML class III
Display	30mm (1.2") 5 digits LCD or LED
Zero Range	4% F.S.
Tare Range	20% F.S.
Overload Indication	100% F.S. + 9e
Max. Safety Load	125% F.S.
Ultimate Load	400% F.S.
Battery Type	Fully sealed Lead-Acid battery, 6V/5Ah
Battery Life	≥50 hours
Adapter	DC 9V/1000mA
Operating Temperature Range	- 20°C ~ + 50°C
Operating Humidity	≤85% RH under 20°C
Remote Controller Distance	Max. 15m
Battery of Remote Controller	7# battery, 1.5V x 2