


Truck Scale Indicator



GSI201+P-1

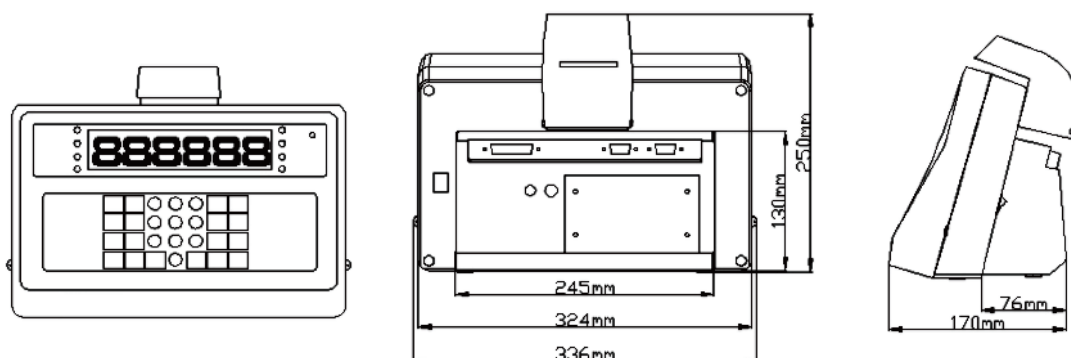

INTRODUCTION

GSI201-1-P weighing indicator can be used in connection with single or multiple load cells, and directly display the weighing value through the principle of A/D conversion. AC and DC dual-purpose, plastic shell, 6-digit 30.5mm LED display, with micro-printer, mainly suitable for electronic ground scales, electronic truck scales and other occasions.

PRODUCT FUNCTION

- Four-point calibration ;
- Zero position automatic tracking range selection function ;
- Power-off data protection, uninterrupted clock ;
- Replacing the indicator does not require re-calibration with weights ;
- Pricing function: 10 unit price storage functions ;
- Digital filter time selection function ;
- Kg-t conversion ;

- Overloaded by 30% of full scale the meter will lock ;
- Car number, tare weight 200 storage, power off protection ;
- Can store 1000 weighing records (power failure protection) ;
- Daily report, monthly report, classification (vehicle number, article number) statistics ;
- Manual/Automatic print selection function ;

TECHNICAL PARAMETER

Accuracy	1/3000
Display accuracy	1/3000 ~ 1/30000
Sensor excitation voltage	5V DC
Supply voltage	100 ~ 240VAC 50HZ
Battery	Lead-acid battery , 6V/4AH
Max number of connected load cell	350Ω 1 ~ 8pcs or 700Ω 1 ~ 16pcs
Operating temperature range	0℃ ~ +40℃
Storage temperature and humidity	-25℃ ~ +55℃ , ≤85%RH
Communication	Standard: 2pcs RS232 ports, optional RS485
Baud rate	1200/2400/4800/9600