



GWM205

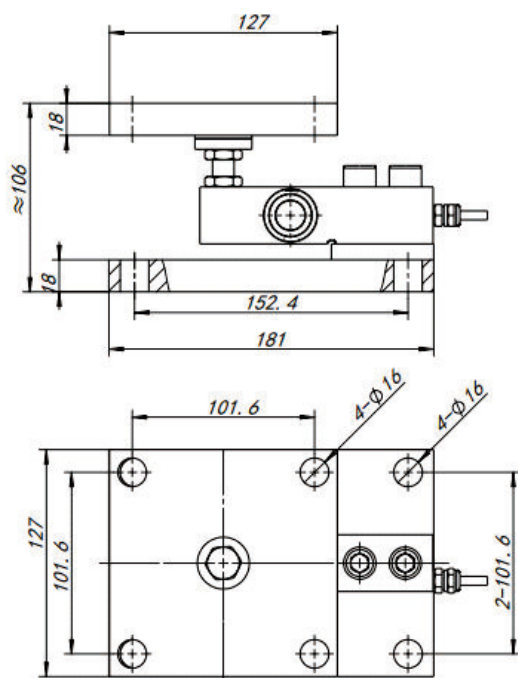

5~30kN

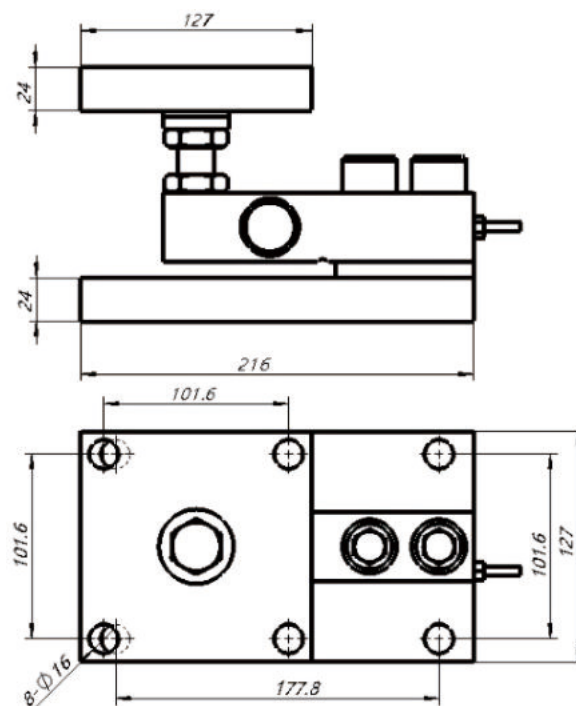

50kN

FEATURES

- Alloy steel material, nickel-plated surface, moisture-proof;
- Compact structure, easy installation;
- The mounting height is adjustable;
- Widely used in tank, tower, hopper scale and other occasions.

PARAMETERS

Rated Load	5 , 10 , 20 , 30 , 50(kN)		
Comprehensive Error	$\pm 0.02 \sim 0.05\% \text{F.S}$	Excitation, Recommended	10VDC
Rated Output	2.0mV/V	Safe Overload	150%F.S
Zero Balance	$\pm 1\% \text{F.S}$	Ultimate Overload	200%F.S
Creep	$\pm 0.02\% \text{F.S}/30\text{min}$	Insulation Resistance	$\geq 5000\text{M}\Omega(50\text{VDC})$
Input Resistance	$380 \pm 10\Omega$	Cable	4-Wire Shielded Cable
Output Resistance	$350 \pm 3\Omega$	Cable Length	$< 5\text{t} , 3\text{m} ; \geq 5\text{t} , 6\text{m}$
Temp.Effect on Output	$\pm 0.02\% \text{F.S}/10^\circ\text{C}$	Ingress Protection	IP65
Temp.Effect on Zero	$\pm 0.02\% \text{F.S}/10^\circ\text{C}$	Wiring Code	Exc+ : Red Exc- : Black
Operating Temp.Range	$-20 \sim +65^\circ\text{C}$		Sig+ : Green Sig- : White