



Micro load cell GML635

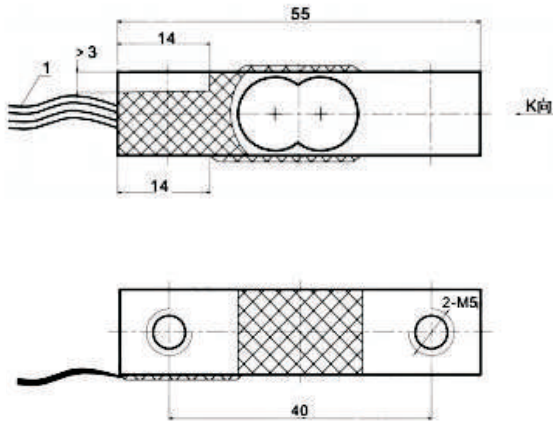


Installation size (mm): 55*12.7*12.7



Wiring code

4 Color PVC Wires : $\phi 0.8 \times 220\text{mm}$

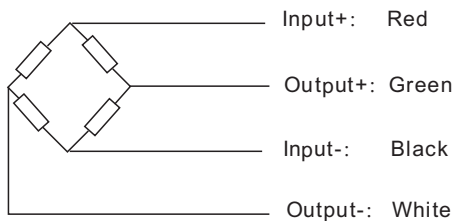

Main features

Micro load cell can be applied in postal scales, fishing scales, kitchen scale, another micro electronic weighting systems.

Features

- Aluminum-alloy
- Easy to install And use
- Glue-sealing
- Portable scales

Technical Specification

Item	Specification
Range	1~50(kg)
Comprehensive error	0.05%F.S
Sensitivity	1.0±0.1mV/V
Non-linearity	0.05%F.S
Hysteresis	0.05%F.S
Repeatability	0.05%F.S
Creep	0.05%F.S/3min
Zero balance	±0.1mV/V
Input resistance	1000±10Ω
Output resistance	1000±10Ω
Insulation resistance	≥2000MΩ
Temp. effect on zero	0.03%F.S/10℃
Temp. effect on span	0.03%F.S/10℃
Use Temp .range	-10~+40℃
Excitation voltage	3-10VDC
Safe overload	120%
Ultimate overload	150%
Defend grade	IP65