



Weighing Modules

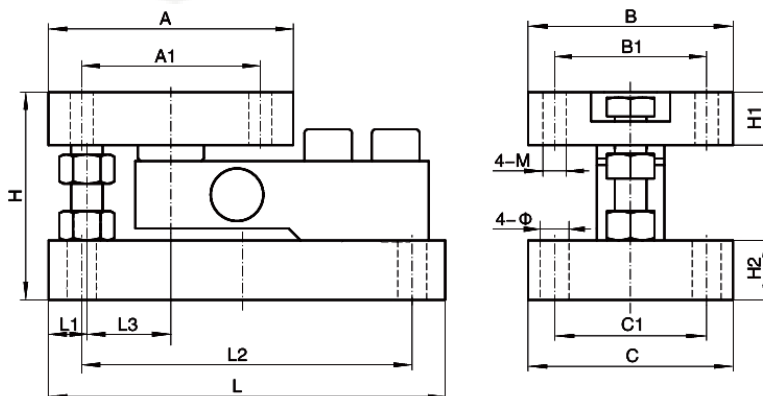

GWM200

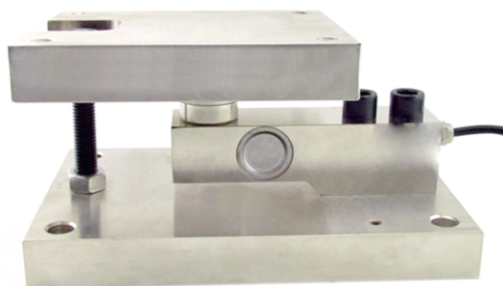

Rated Load		Size(mm)														
kN	t	A	A1	B	B1	C	C1	L	L1	L2	H	H1	H2	W	M	φ
0.5~1	0.05~0.1	110	95	100	80	100	80	180	15	160	85	20	20	45	8	10
2~10	0.2~1	150	125	100	100	125	100	210	20	180	110	25	25	70	10	12
15~50	1.5~5	175	135	150	115	150	115	260	25	220	145	35	30	72.5	16	18
70~100	7~10	185	135	155	115	155	115	300	25	250	157	40	45	67.5	20	22
150~200	15~20	220	180	210	170	210	170	300	30	350	220	55	55	90	24	26

FEATURES

- Alloy steel material, nickel-plated surface, moisture-proof;
- With limit bolt, easy to install;
- Shear beam weighing sensor, high precision;
- Widely used in tank, tower, hopper scale and other occasions.

PARAMETERS

Rated Load	0.5~200(kN)		
Comprehensive Error	±0.02~0.05%F.S	Excitation,Recommended	10VDC
Rated Output	2.0mV/V	Safe Overload	150%F.S
Zero Balance	±1%F.S	Ultimate Overload	200%F.S
Creep	±0.02%F.S/30min	Insulation Resistance	≥5000MΩ(50VDC)
Input Resistance	380±10Ω	Cable	4-Wire Shielded Cable
Output Resistance	350±3Ω	Cable Length	< 5t , 3m ; ≥5t , 6m
Temp.Effect on Output	±0.02%F.S/10℃	Ingress Protection	IP65
Temp.Effect on Zero	±0.02%F.S/10℃	Wiring Code	Exc+ : Red Exc- : Black
Operating Temp.Range	-20~+65℃		Sig+ : Green Sig- : White