


GPB207R-2t

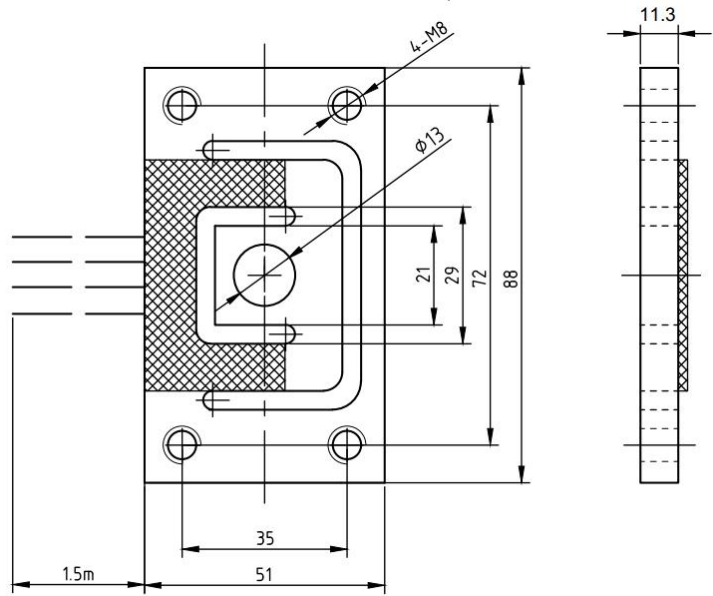

Features

- Alloy steel(42CrMo), surface nickel plating, Silicone rubber sealant;
- Very low profile, matched output;
- Suitable for low-height electronic weighing devices such as platform scales, livestock scales and ground scales.

Parameters

Rated Load	2t	Compensated Temp Range	-10~+60°C
Comprehensive Error	0.02%F.S	Operating Temp Range	-20~+80°C
Rated Output	1.8 ± 0.2mV/V	Excitation, Maximum	18VDC
Zero Balance	±2%F.S	Excitation, Recommended	6~12VDC
Linearity Error	±0.02%F.S	Safe Overload	120%F.S
Repeatability Error	±0.02%F.S	Ultimate Overload	150%F.S
Hysteresis Error	±0.02%F.S	Insulation Resistance	≧ 5000MΩ(100VDC)
Creep	±0.02%F.S/5min	Cable	4 Color PVC Wires
Input Resistance	1090±30Ω	Cable Length	Φ1.0×1500mm
Output Resistance	1000±5Ω	Ingress Protection	IP65
Temp.Effect on Output	±0.05%F.S/10°C	Wiring Code	Exc+: Red Exc-: Black
Temp.Effect on Zero	±0.05%F.S/10°C		Sig+: Green Sig-: White